



Eisinger Soldering Tweezers

Description	Length	Order#
Straight with serrated tips and grip	7" (178mm)	29-351
Curved with smooth points	6 3/4" (171mm)	29-352
Cross-lock (self-closing) with blunt, serrated tips	6 1/4" (165mm)	29-353
Slide lock with serrated tip	5 1/4" (138mm)	29-354
Cross-lock (self-closing) with pointed, serrated tips	6 1/4" (165mm)	29-355
Cross-lock (self-closing) with short and smooth tips	4 3/4" (121mm)	29-356
Fiber-grip cross-lock straight with heat resistant grip	6" (152mm)	29-371
Fiber-grip cross-lock curved with heat resistant grip	6" (152mm)	29-372
Fiber-grip with spring action heat resistant grip	6" (152mm)	29-373




StarLeaf Vacuum Tweezer Pick-Up System

29-500
 Handles stones without causing any scratching or contamination. Consists of vacuum generator, lightweight vacuum pencil, filter, six feet of tubing, five stainless steel probe tips and three vacuum cups. Operates on any 110-120V AC line (220V available).
 Dimensions: 3" dia x 4 1/4" h (76 x 114mm)
 Ship wt: 1lb (450g)



Platinum Soldering Tweezers

29-368
 Non-contaminating carbide tweezers
 29-369
 Non-contaminating ceramic tip tweezers

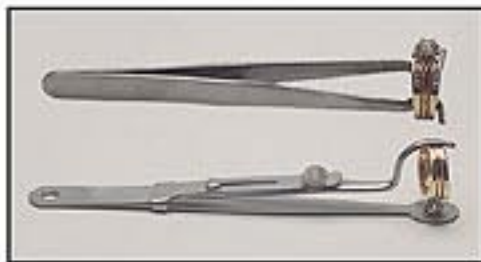

Ring-Set Soldering Tweezers

29-395
 4 1/4" (115mm) tweezers for holding engagement and wedding bands together while soldering.

Head and Shank Tweezers

29-397
 For holding setting to ring shank. Slide locking. 5 1/4" (140mm) length




StarLeaf Handling Tweezers

With sharp points and beveled edges.

Description	Length	Order #
#AA Most popular with strong spring action	4 3/4" (115mm)	29-301
#GG Very fine long points	5 1/4" (133mm)	29-303
#MM Heavier version of #AA	5" (127mm)	29-306
#NN Shorter version of #MM	4 1/4" (114mm)	29-307
#RR Wider and heavier than #AA	5 1/4" (140mm)	29-311



29-600

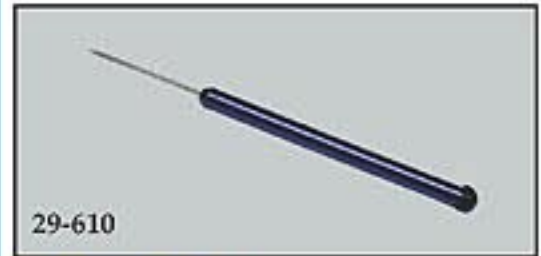

29-610

Solder Picks

Used to handle solder for positioning. Titanium can be used for platinum.
 Length: 7" (179mm)
 29-600 - Titanium
 29-610 - Tungsten



Copper Pickling Tweezers

29-365
 9" (228mm) tweezers that will not contaminate pickle.